



ANTENNAS | HELI-5 SERIES

HELICAL MINE & TUNNEL ANTENNA HIGH GAIN LTE MINE & TUNNEL 1710 – 2170 MHZ

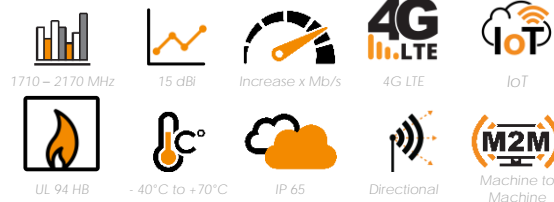

- Circular polarised helical antenna
- LTE directional
- Ruggedized

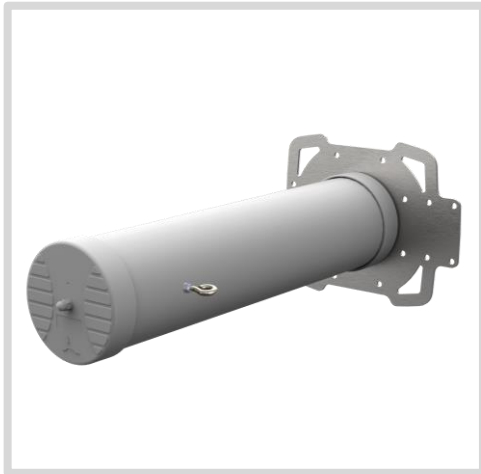

Product Overview


This high gain LTE directional antenna compliments our MinePoynt mine and tunnel antennas. The combination of MinePoynt beam antennas for long distance thru –tunnel links with this directional antenna, exploits Poynting's fifteen years' experience in designing and manufacturing antennas for underground mining communication and data networks. This antenna is also suitable for oil/gas chemical environments where IS equipment is required. In tests the data rate and range achieved with this antenna was greater than obtained when using linear polarised panel antennas of the same gain. The hardy construction of the antenna makes it ideal for a mining environment. The HELI 5 operates from 1710 MHz – 2170 MHz while the HELI 6 operates from 690 MHz – 960 MHz.

Features

- Proven antenna performance giving maximum range.
- Ideal where other devices used polarisation could change.
- High gain over the 1710 -2170Mhz range.
- Intrinsically safe version available


Application Areas

- Supplementing fibre /cable networks "Hotspots" to areas to enhance mobility or extend networks to inaccessible areas such as mines and tunnels.
- Underground telemetry.
- Creating of complete underground in tunnel wide data networks and internet/LTE connectivity.
- Seamless connection to personnel using cellular phones and smart devices and tablets.

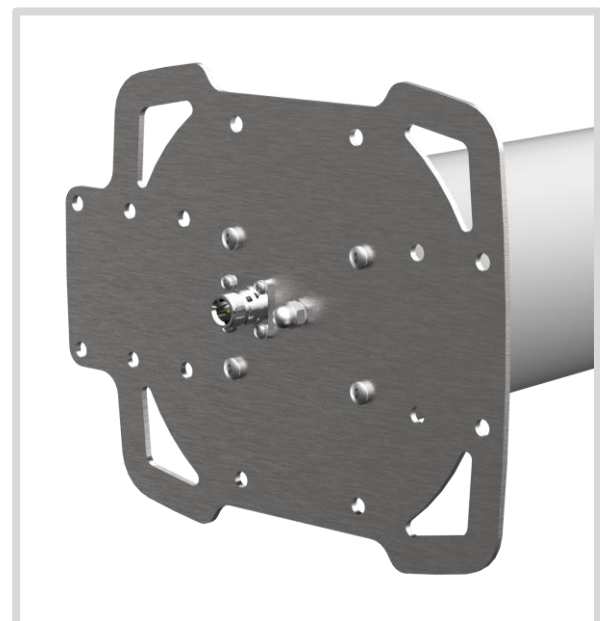

Frequency Bands

The HELI-5 is a wide-band antenna that works from 1710 – 2170 MHz.

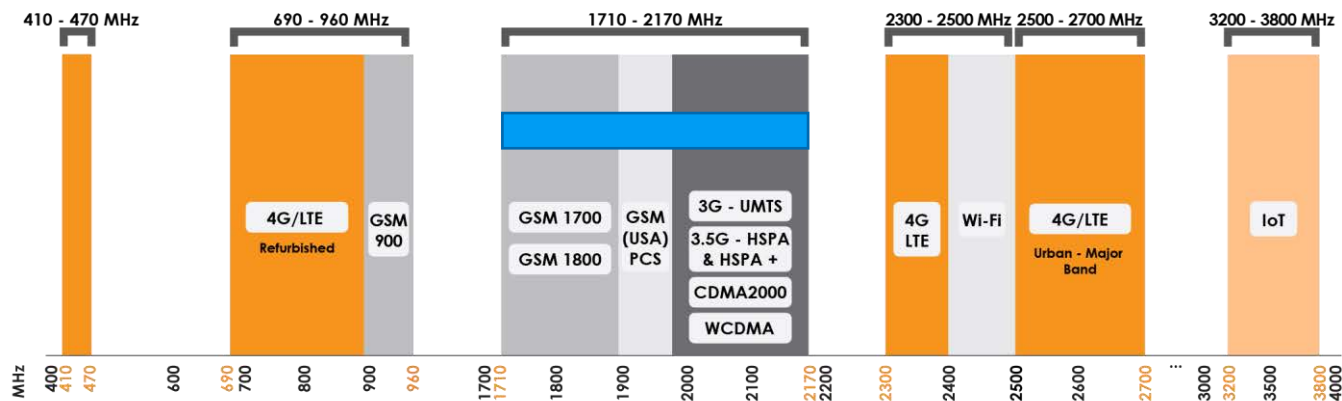

Indicates the LTE bands on which HELI-5 works

Antenna Overview

Ports	1
SISO / MIMO	1 x SISO
Frequency Bands	1710 MHz - 2170 MHz
Peak Gain	15 dBi
Connector Type	N-Type Female Bulkhead connector

Electrical Specifications

Frequency bands:	1710 MHz – 2170 MHz
Gain (max):	15 dBi
VSWR:	<1:5
Feed power handling:	30 W
Input impedance:	50 Ohm (nominal)
Polarisation:	Right Hand Circular Polarised
Coax cable loss:	N/A
DC short:	Yes

Coax Cable & Connector Type

Cable length:	N/A
Coax cable type:	N/A
Connector type:	N-Type (Female) Bulkhead

**The coax cable & connector is factory mounted to the antenna*

Product Box Contents

Antenna:	A-HELI-0005-V1-05
Mounting bracket:	12mm ID Eye Hook (Ceiling mount) & 50 mm Pole mount

Ordering Information

Commercial name:	HELI-5
Order product code:	A-HELI-0005-V1-05
EAN number:	6009880915446

Mechanical Specifications

Product dimensions	± 500 mm x 110 mm
Packaged dimensions:	600mm x 160mm x 160mm
Weight:	1.50 kg
Packaged weight:	1.8 kg
Radome material:	PVC
Radome colour:	Grey
Mounting Type:	12mm ID Eye Hook & 50 mm Pole mount


Environmental Specifications, Certification & Approvals

Temperature Range (Operating):	-40°C to +70°C
Environmental Conditions:	Outdoor/Indoor
Water ingress protection ratio/standard:	IP 65
Salt Spray:	MIL-STD 810F/ASTM B117
Operating Relative Humidity:	Up to 98%
Storage Humidity:	5% to 95% - non-condensing
Storage Temperature:	-40°C to +70°C
Flammability Rating:	UL 94-HB
Impact resistance:	IK 08
Product Safety & Environmental:	Complies with CE, EN, CSA, RoHS and IEC standards




Antenna Performance Plots

VSWR

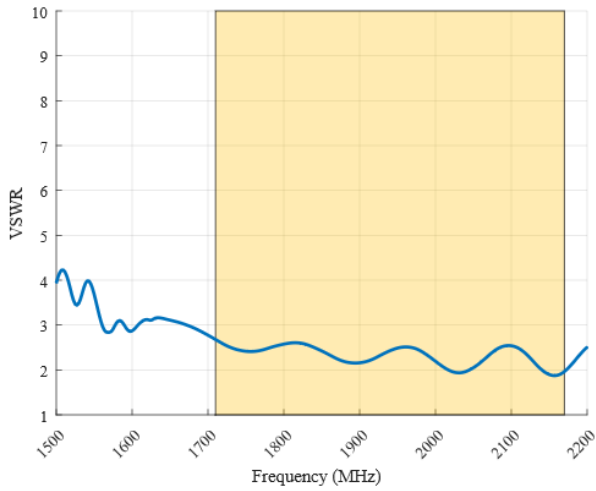

GAIN (EXCLUDING CABLE LOSS)

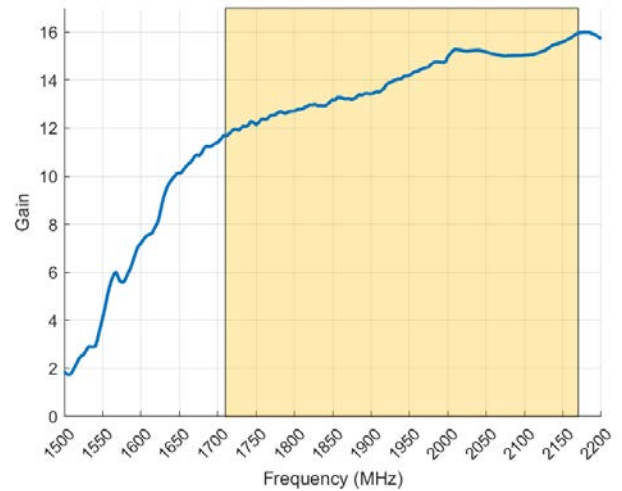

Voltage Standing Wave Ratio (VSWR)

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The HELI-5 delivers superior performance across all bands with a VSWR of 2:1 or better across 90% of the bands.

Gain* in dBi


12.5 dBi is the peak gain across all bands from 1710 – 2170 MHz.

Gain @ 1710 – 2170 MHz:

15 dBi


*Antenna gain measured with polarisation aligned standard antenna

Technical Drawings

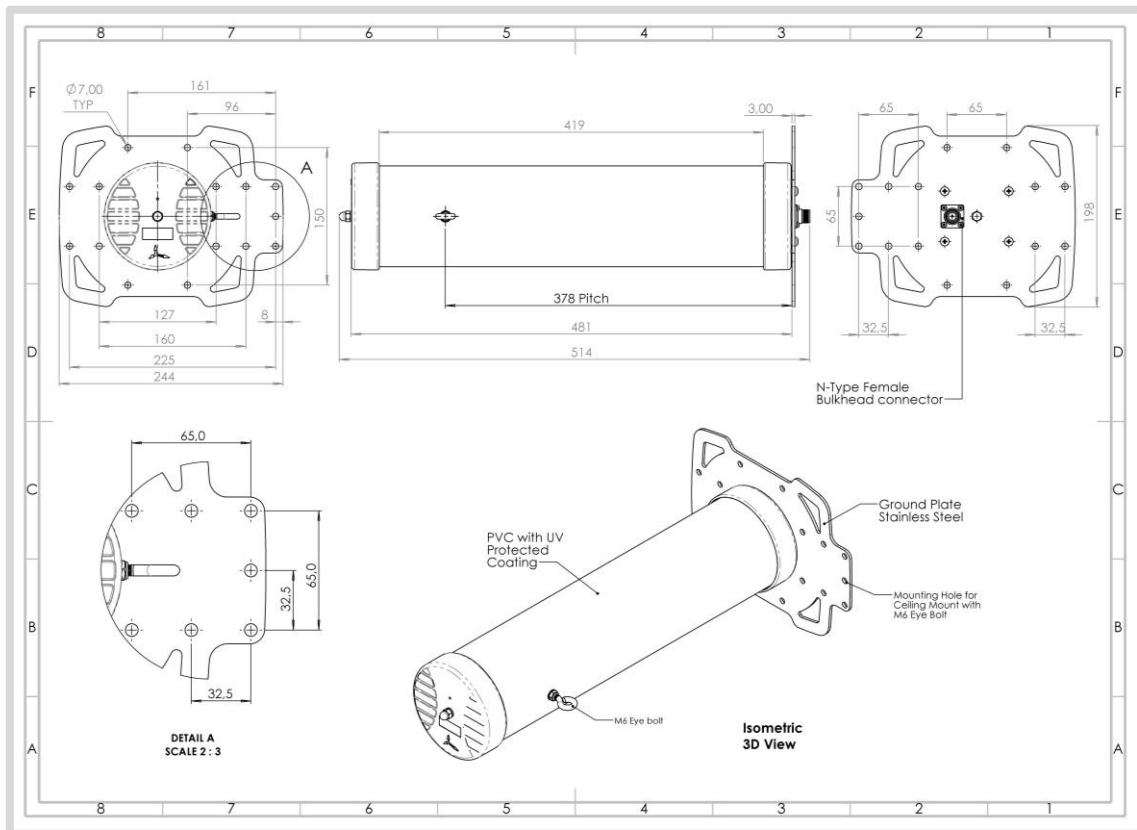


Radiation Patterns


Elevation:1 1710 MHz – 2170 MHz

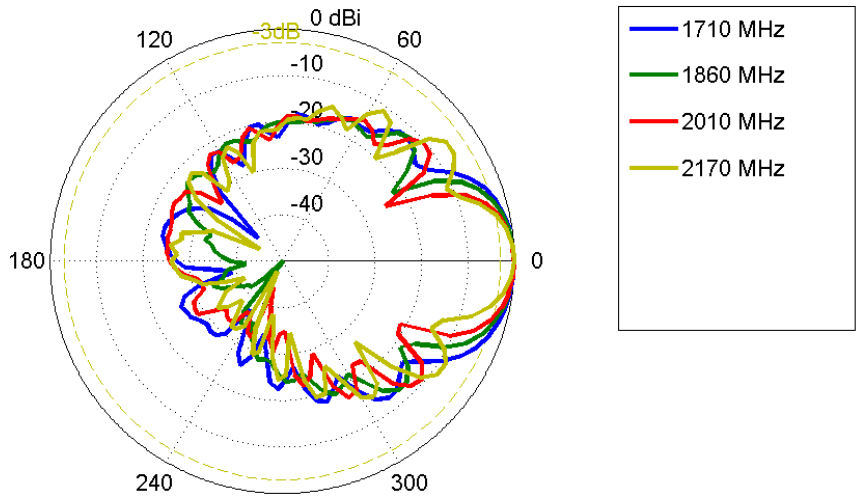

Elevation:2 1710 MHz – 2170 MHz

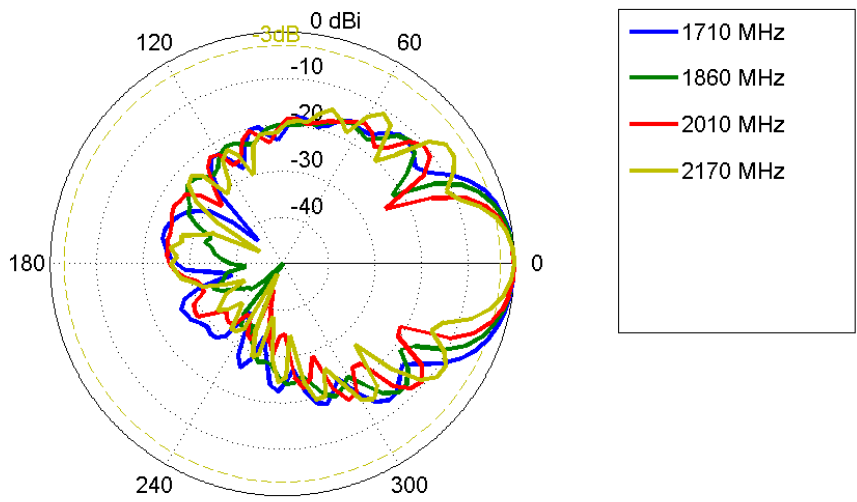

Mounting Options

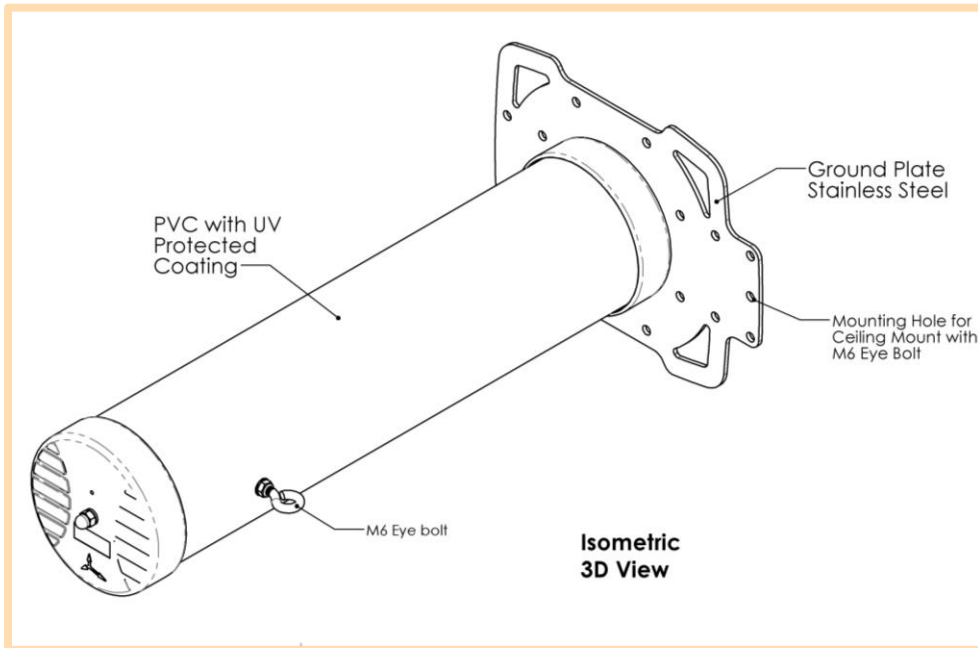

Ceiling Mount

Hang from ceiling to desired height
with cable attached to M6 Eye bolts
and mounting hole on Ground Plate.

Contact Poynting

Poynting Antennas (Pty) Ltd - Head Office
Unit 4, N1 Industrial Park
Landmarks Avenue,
Samrand, 0157
South Africa
Phone: +27 (0) 12 657 0050
E-mail: sales@poynting.co.za

Poynting Europe
Regus Business Center Neue Messe Riem
Kronstadter Straße 4
81677 München
Germany
Phone: +49 89 208026538
E-mail: sales-europe@poynting.tech